

Pneumatic products for industrial applications

Product catalogue



Content

Special constructions

Custom-made products

Page 3

Industrial bags 8 bar (116 psi)

Industrial bags 8 bar (116 psi): V and IKV series

Page 4

Accessories

Inflation of the bags

Page 8

IDEX Units

Lukas – moving your projects

Page 11

Vetter resistance lists

Temperature resistance, material and resistance lists

Page 16



Special constructions

Special tools for every application

- › different materials
- › many sizes and shapes possible
- › precise and steplessly variable
- › numerous applications

We implement your tool idea: Especially in the industrial sector, special tools tailored to individual needs are often required. This is where our special and custom-made products come in: Together with our customers, we develop and manufacture pneumatic constructions for every application. Flexibility and versatility are the top priorities: Whether material, operating pressure, size, shape, filling connection or resistance – our customers can choose from many different options, have a say themselves and create their desired tool together with our experts.



Pipe gripper with internal expansion



Pipe gripper with external expansion



Gel packer with constriction



Testing device Pipe jacking

Industrial bags 8 bar (116 psi): V and IKV series

The silent powerhouse

- › in a flash
- › type designation = lifting power
- › can be controlled with

Even the heaviest loads lifted quickly: The Vetter industrial bags 8 bar (116 psi) are real performance wonders and lift, push, press, prise and split even the heaviest loads with ease - and even in inclined position. They operate silently, smoothly and steplessly.

Due to their multi-layer construction (aramid armouring), which covers each side of the bag broadly, they are extremely robust and at the same time particularly light weight. Their surface profile ensures improved grip even on slippery surfaces such as grass or sand. 8 bar industrial bags can be filled with both air and water. The necessary accessories can be put together individually.

Optionally, we also offer the 8 bar (116 psi) industrial bags:

- with smooth surface
- with other inflation connections (e.g. central)
- in special sizes or shapes
- with other operating pressures

Just get in touch with us and together we will find the right model for your purpose.

The right bags for every application



The industrial bags of the **V-Series** are particularly suitable for **temporary applications**, such as:

- › Assembly and maintenance work on machines and other equipment
- › Moving and adjusting heavy loads

The industrial bags of the **IKV series** have been specially developed for applications with **high lifting frequencies**, such as:

- › Closing device in presses or other machine
- › Regular pressing or lifting of loads
- › Mould ejection in production lines

Technical Data*

The sizes V 1 (IKV 1) – V 40 (IKV 40) have an insertion height of 2.5 cm (0.98 inch), V 54 (IKV 54) – V 68 (IKV 68) of 2.8 cm (1.1 inch).

Industrial bags 8 bar (116 psi)		Lifting power	Lifting height**, max.	Size	Air requirement	Weight, approx.
		to / US tons	cm / inch	cm / inch	Liter / cu.ft.	kg / lbs
V 1 1314009300	IKV 1 5100010800	1.0 1.1	7.5 3.0	14x13 5.5x5.1	2.7 0.1	0.5 1.1
V 3 1314009500	IKV 3 5100010900	3.3 3.6	12.0 4.7	25.5x20 10x7.9	15.8 0.6	1.0 2.2
V 5 1314018200	IKV 5 5100011000	5.7 6.3	14.5 5.7	28x28 11x11	28.4 1.0	1.4 3.1
V 6 1314009600	IKV 6 5100011100	6.4 7.0	16.5 6.5	29.5x29.5 11.6x11.6	39.6 1.4	1.9 4.2
V 10 1314002200	IKV 10 5100011200	9.6 10.6	20.3 8.0	37x37 15x15	82.8 2.9	3.3 7.3
V 12 1314002400	IKV 12 5100010600	12.0 13.2	20.0 7.9	32x52 13x20	96.3 3.4	3.9 8.6
V 18 1314002500	IKV 18 5100011300	17.7 19.5	27.0 10.6	47x52 19x20	195.3 6.9	5.7 12.6
V 20 1314011800		19.4 21.4	28.0 11.0	48x58 19x23	224.1 7.9	6.2 13.7
V 24 1314002600	IKV 24 5100011500	24.0 26.5	30.6 12.0	52x62 20x24	296.1 10.4	7.2 15.9
V 24 L 1314002700	IKV 24 L 5100011600	24.0 26.5	20.1 7.9	31 x 102 12 x 40	211.5 7.5	6.8 15.0
V 31 1314002800	IKV 31 5100011700	31.4 34.6	37.0 14.6	65x69 26x27	517.5 18.0	10.1 22.3
V 35 L 1314018300		35.8 39.5	31.0 12.2	43 x 115 17 x 45	349.4 12.3	10.0 22.1
V 40 1314002900	IKV 40 5100011900	39.6 43.7	40.2 15.8	78x69 31x27	675.0 23.6	12.2 26.9
V 54 1314003000	IKV 54 5100012100	54.4 60.0	47.8 18.8	86x86 34x34	1,117.8 39.5	17.3 38.1
V 68 1314003100	IKV 68 5100012200	67.7 74.6	52.0 20.5	95x95 37x37	1,457.1 51.4	20.7 45.6

* Subject to technical changes. / ** Please note our load path diagram!

Industrial bags (8 bar): Operating pressure: 8 bar (116 psi) | Test pressure: 14 bar (203 psi) | Burst pressure at least: 32 bar (464 psi)
L: Elongated industrial bag


The right bags for maximum lifting power

In order for our industrial bags to develop their maximum lifting power, the entire surface of the bag – i.e. total surface area minus the edge areas – must lie fully under the load to be lifted and the bag must be filled with the max. permissible operating pressure.

Which industrial bag you use depends on the weight of the load to be lifted and the stroke distance. Please note: An industrial bag develops the greatest power at the beginning of the stroke distance. It reaches its maximum lifting height when unloaded.

The result is that the stroke distance shortens as the load increases. In the load path diagram below, we have illustrated this process again for different industrial bag models.

Load path diagram V 10 – V 68 / IKV 10 – IKV 68

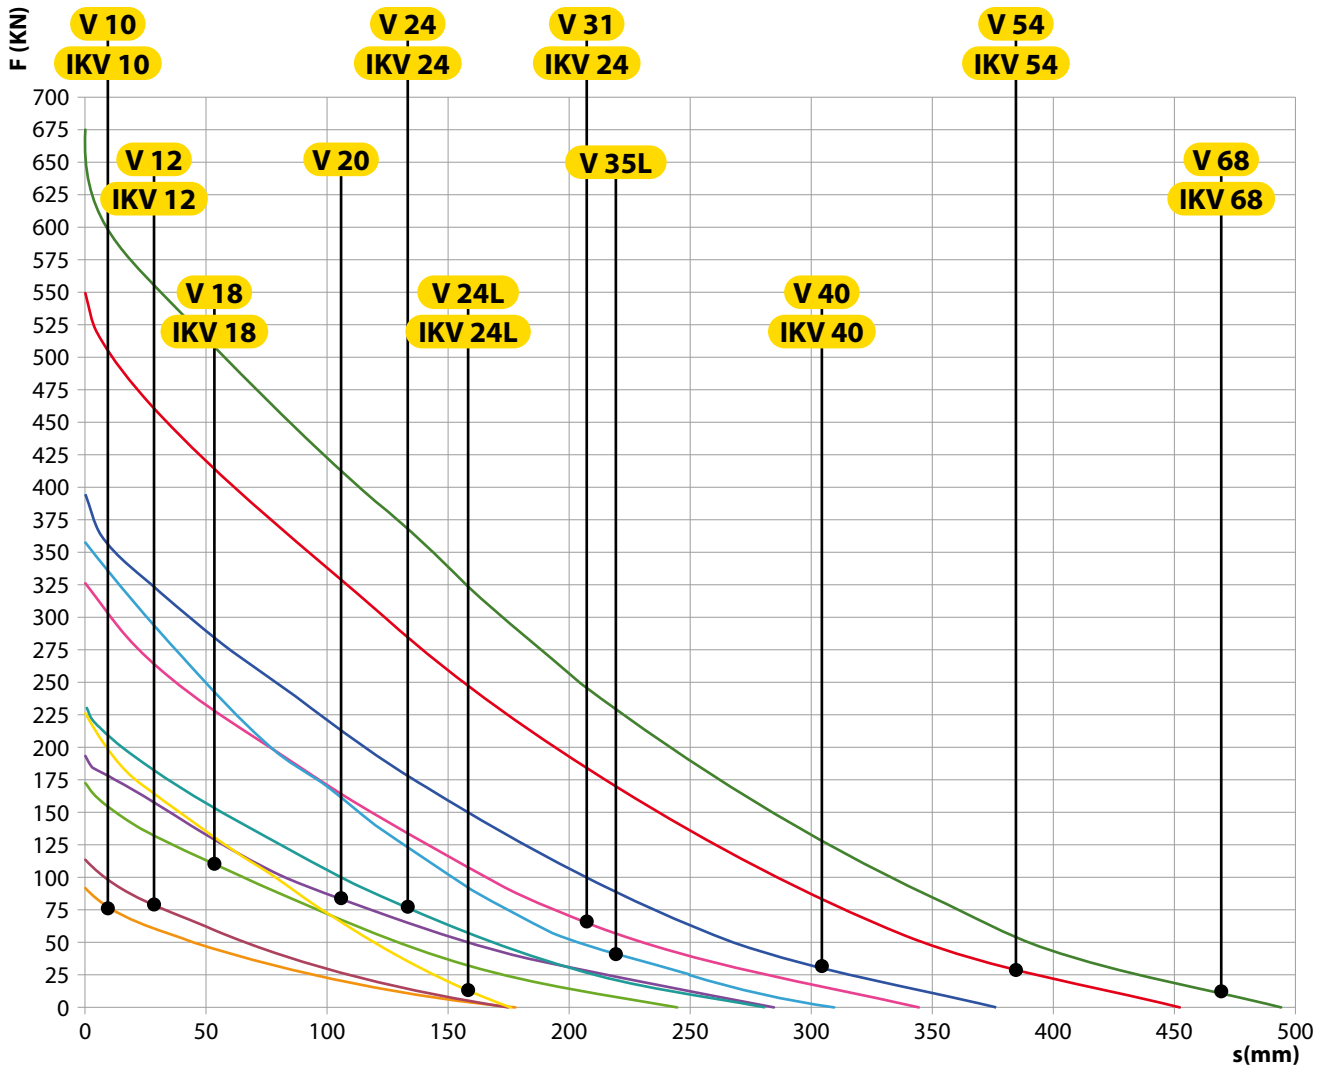


We will be happy to provide you with load path diagrams of the individual bags on request.

Examples for applications of the industrial bags of the V and IKV series



Steel industry

- Small insertion dimension from 2.5 cm (0.98 inch)

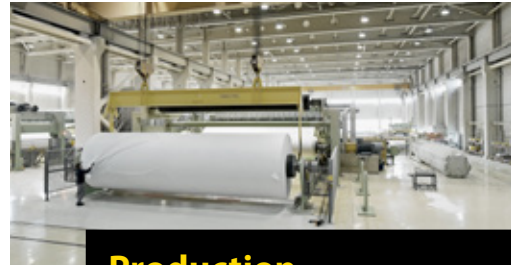

Production

- Aligning the elements during assembly



Bridge

- Substructure of bridge elements



Rail traffic

- Lifting of rail vehicles




Mining

- Creating spaces



Wind

- Wind turbine assembly

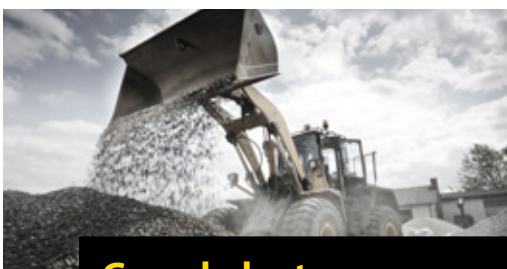

Gravel plants

- Lifting trucks, machines, etc.



Agriculture and forestry

- Lifting agricultural and forestry machinery for maintenance work
- Splitting a tree trunk

Accessories – Inflation of the bags

8 bar (116 psi)

Inflation hose, 8 bar (116 psi)

5 m (16.4 ft.):
080000901 ● (Yellow)

10 m (32 ft.):
0800007401 ● (Yellow)

5 m (16.4 ft.): 0800001301 ● (Red)

10 m (32 ft.): 0800007601 ● (Red)



Shut-off unit, 8 bar (116 psi)

> 0,3 m (1 ft.)

0800007301 ● (Yellow)

0800007201 ● (Red)



Air CU Lighting

- > Deadman controller, 8 bar (116 psi)
- > circuit plastic housing with lighting



Dual controller:
0800019900

Shut-off unit, 8 bar (116 psi)

0800005800



Aluminium controller

- > Deadman controller, 8 bar (116 psi)
- > circuit connectable



Dual controller:
0800015800

Fitting controller*

- > controller, 8 bar (116 psi)

Single: 0800002001

Dual: 0800002401



*According to EN 13731, these items are not approved for use by fire services within the EU.

Inflation with cylinder

Compressed air cylinder

- › 1 l/200 bar (0.04 cu.ft. / 2,900 psi), steel, 5/8" IT, 200 l (7.1 cu.ft.)

▶ **1600010100**

- › 6 l/300 bar (0.21 cu.ft. / 4,350 psi), steel, 5/8" IT, 1,800 l (63.5 cu.ft.)

▶ **1600010800**

- › 9 l/300 bar (0.32 cu.ft. / 4,350 psi), composite, 5/8" IT, 2,700 l (95.3 cu.ft.)

▶ **1600019900**




Dual connector

- › for simultaneous connection of 2 compressed air cylinders
- › thread 5/8"

▶ **200 bar (2,900 psi):**
1600008400

▶ **300 bar (4,350 psi):**
1600009100



Pressure regulator

- › 200/300 bar (2,900/4,350 psi)
- › max. outlet pressure, 14 bar (203 psi)

▶ **1600031900 | 1600032000 (USA)**



Inflation with alternative air source**

Air supply hose

- › Green
- › 10 m (32 ft.)
- › with shut-off valve

▶ **1600013601**



Truck tyre valve

▶ **1600008000**



Truck tyre inflation system adapter

▶ **1600007800**



Truck tyre valve connector

▶ **1600012900**



**For any other air source than the compressed air cylinder you need the green supply hose.

Accessories – Inflation of the bags

Compressor

Adapter fitting for construction compressor

▶ 1600012000



Adapter fitting for portable compressor

▶ 1600008200



Truck brake line

Truck compressed air connector

▶ Dual circuit system

▶ 1600007500



Sealing-off cap

▶ 1600012600



Adapter set for all compressed air sources

The complete set with all adapters and valves listed below is available under the following item number:

▶ 1600012501



The set includes:

- ▶ 2x air supply hose, 10 m (32 ft.), green with shut-off valve
- ▶ Truck tyre inflation system adapter
- ▶ Truck tyre valve
- ▶ Truck tyre valve connector
- ▶ Truck compressed air connector
- ▶ Sealing-off cap
- ▶ Adapter fitting for construction compressor
- ▶ Adapter fitting for stationary compressed air network
- ▶ Bag 18x45 cm (7 x 17.7 inch)

Non-movable compressed air network

Adapter fitting for stationary compressed air network

▶ 1600008200



Pre-pressure regulator

▶ max. inlet pressure, 16 bar (232 psi)**

▶ 1600014500



**Note: If the outlet pressure of the compressed air network exceeds the permissible filling pressure of the control element, the adapter fitting must be replaced with the upstream pressure reducer.

LUKAS



LUKAS Hydraulik GmbH · A Unit of IDEX Corporation · www.lukas.com · www.lukas-store.de

POWERFUL PARTNERS POWERFUL PERFORMANCE

OUR PRODUCTS
PERSUASIVE WITH EVERY APPLICATION

LUKAS – MOVING YOUR PROJECTS.

LUKAS has been developing and manufacturing exceptional high-pressure hydraulics for industrial use in various sectors since 1948. No matter what loads need to be moved, we have the right product for your application scenario, because we are pioneers in the development of light metal cylinders and are particularly proud of the quality of our tools.

The material for our powerful helpers is aluminium and therefore not only particularly light, but also extremely corrosion-resistant. LUKAS cylinders move reliably, have a long service life and material fatigue is very low.

But most important to us is your safety. That's why you can connect special hoses to all cylinders in our 500 bar range, whose quick-stop system prevents the load from dropping uncontrollably during your projects. The unique quick-connect coupling, to which you connect the hoses with just one hand movement, also saves you crucial time.

Each of our LUKAS products is assembled with passion and precision for your exceptional projects.

Then as now – reliable, flexible and durable.

Are you interested? Then contact
LUKAS Hydraulik GmbH directly at
lukas.info@idexcorp.com.



You can find more information about our industrial product portfolio at: www.lukas.com/industrial

LUKAS

moving your projects



LUKAS LUKAS Hydraulik GmbH
Weinstraße 39 91058 Erlangen Germany
T: +49 (0)9131/698-0 F: +49 (0)9131/698-394
lukas.info@idexcorp.com www.lukas.com
85145 3005
LFM 25/25 - PN250
ohne Federkraftzug
Fd = 251 kN
Ser. No.: 335287
Made in Germany

26 t

LUKAS LUKAS Hydraulik GmbH
Weinstraße 39 91058 Erlangen Germany
T: +49 (0)9131/698-0 F: +49 (0)9131/698-394
lukas.info@idexcorp.com www.lukas.com
85145 1813
LFM 6/160 - PN500
Fd = 63 kN
Ser. No.: 334514
00002
Nov - 2020
Made in Germany

6 t

CE Made in Germany

Vetter resistance lists

Reliability at a glance

Knowing what matters: Pneumatic products must withstand extreme thermal conditions and chemical influences when in use. So that you can always rely on our products, we have listed our detailed resistance specifications below. This gives you a quick overview of the temperature resistance, material used and resistance of our products to chemical substances.

The data are based on laboratory tests and empirical values and are influenced by variable factors such as temperature, intensity or exposure time.

The following symbols indicate the degree of resistance:

- + resistant
- not resistant
- o conditionally resistance
- n. a. not specified

Please note:

A material under strain reacts more quickly to chemicals than when at rest. This means that the greater the elongation, the lower the chemical resistance. In addition, the resistance of our products also depends on the thickness of the material, due to diffusion.

Therefore, this resistance list serves only as a guide. We will be happy to provide you with material samples for your own determination of chemical resistance.

Temperature resistance

Products	cold resistant	cold flexible	heat resistant long-term	heat resistant short-term
Industrial bags 8 bar (116 psi)	- 40 °C	- 20 °C	+ 90 °C	+ 115 °C
Rubber hoses	- 40 °C	- 30 °C	+ 90 °C	--
Control elements: Plastic, aluminium and fitting construction	- 20 °C	--	+ 50 °C	--

Materials list

Products	Material	Carrier Material
industrial bags 8 bar (116 psi)	CR	Aramide
Filling hoses and air supply hoses (outside)	EPDM	Polyester

Resistance list*

Substance name	CR	NR	EPDM
Acetone	o	+	-
Acetylene	+	+	-
Alum aqueous	+	+	-
Aluminium chloride	+	+	+
Aniline	-	n. a.	n. a.
ASTM oil 1	o	-	-
Petrol	o	-	n. a.
Benzene	-	-	-
Boric acid	+	+	+
Bromine (wet)	-	-	-
Butyric acid	-	-	n. a.
Chlorine gas (wet)	-	-	n. a.
Chlorine, wet	o	-	o
Diesel fuel	o	-	-
Ferric chloride	+	+	+
Crude oil	o	-	-
Acetic acid	o	+	o
Fatty acids	+	o	-
Formaldehyde	+	+	+
Glucose	+	+	+
Heating oil	+	-	-
Potassium chloride	+	+	+
Calcium chloride	+	+	+
Calcium nitrate	+	+	+
Carbon dioxide	+	+	+
Carbon monoxide	+	+	+
Copper sulphate	+	+	+
Adhesive	+	+	+
Methyl chloride	-	-	o
Seawater	+	+	n. a.
Mineral oils	+	-	-
Sodium carbonate	+	+	-
Ozone	+	-	+
Paraffin	+	-	-
Perchloric acid	o	n. a.	+
Phenol (aqueous)	-	-	+
Phosphoric acid (concentrated)	-	-	-
Mercury	+	+	+
Nitric acid (fuming)	-	-	-
Sulphur dioxide (dry)	-	o	n. a.
Sulphuric acid (50 %)	+	-	-
Nitrogen	+	+	+
Carbon tetrachloride	-	-	-
Animal fats	+	-	+
Toluene	-	-	-

* Subject to change without notice. | + resistant | o conditionally resistant | - not resistant | n. d. no data



Part of the international IDEX Corporation

Vetter is part of the international IDEX Corporation. This corporation invests in successful medium-sized companies in highly specialised markets. All members of the group are characterised by their technical orientation and high innovative strength.

As our customer, you benefit twice over: On the one hand, from our international application knowledge and, on the other hand, from the intensive know-how transfer within the group of companies. Because this know-how flows directly into the development of Vetter's sophisticated and high-performance products.



idexcorp.com





The full-range supplier for industrial pneumatics

Vetter represents sound technological expertise as well as intensive cooperation with fire brigades and industrial companies all over the world. On this basis, we develop high-quality and field-proven pneumatic products that are indispensable in many rescue areas and application scenarios.

Rescue Products

Hazardous material program

Pneumatic tents and decon showers

Oil and water aspirators

Airshore

Aircraft Recovery

Truck recovery

Industrial pneumatic

Inspection, sealing & rehabilitation technology

All products, detailed information and catalogues for download can be found on the Internet at: **vetter.de**

Place your trust in industrial pneumatics!

We will be able to help you.

Vetter GmbH

A Unit of IDEX Corporation

Blatzheimer Str. 10–12
53909 Zülpich
Germany

Sales

Tel: +49 (0) 22 52 / 30 08-0
Fax: +49 (0) 22 52 / 30 08-690
Mail: vetter.water@idexcorp.com

vetter.de

© Copyright | 08.2021 | Vetter GmbH | Subject to alterations and errors.